


1 INPUT / 2 OUTPUT **WATERPROOF PoE EXTENDER**

NO EXTERNAL POWER NEEDED!

Expand your PoE network with the **EXTPOE-1X2** Waterproof PoE Extender. Designed for indoor and outdoor surveillance applications, this compact extender provides one PoE input and two PoE outputs, allowing two IP cameras or PoE devices to operate from a single network cable. Supporting IEEE 802.3af/at standards, plug-and-play installation, and Store-and-Forward switching technology, it delivers reliable power and data transmission while reducing cabling costs. Its IP66 waterproof enclosure makes it ideal for harsh outdoor environments including security monitoring, access control, and industrial networking.

EXT-2POE-WP - 1 INPUT / 2 OUTPUT

PoE Input	1 × 10/100Mbps RJ45 PD Port
PoE Output	2 × 10/100Mbps RJ45 PSE Ports
Ethernet speed	10/100Mbps Auto Negotiation
Forwarding Mode	Store and Forward
Switching Capacity	6Gbps
Packet Forwarding Rate	11.584Mpps
MAC Address Table	2K
Jumbo Frame	9216 Bytes
PoE Standard	IEEE802.3af / IEEE802.3at
Maximum Output Power	30W
Static Power Consumption	≤0.2W
Power Supply	PoE Powered (No External Power Required)
Power Pins	1/2(+), 3/6(-), Supports 4-Core & 8-Core Power
Housing	Plastic
Protection Rating	IP66 Waterproof
Operating Temperature	-10°C ~ 70°C
Storage Temperature	-40°C ~ 85°C
Operating Humidity	10~90% RH (Non-condensing)
Storage Humidity	5~95% RH
Dimensions	92 × 22 × 46 mm

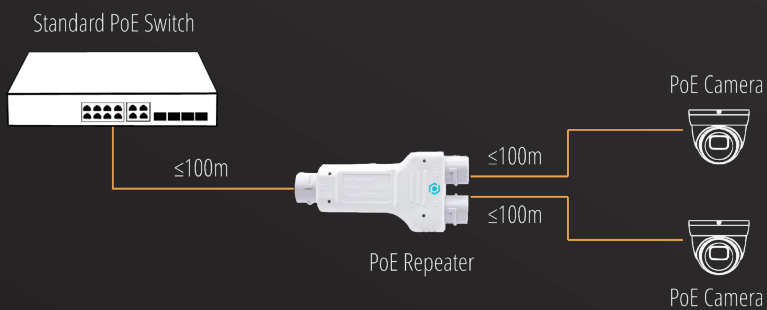

SECURITY. INNOVATION. RELIABILITY.

POWERED BY G.S.D GROUP INC.

At G.S.D Group, we design and deliver innovative, reliable, and high-performance security solutions that protect people, businesses, and critical infrastructure. From intelligent surveillance and access control to enterprise software and AI-powered technologies, we provide complete security ecosystems built for today's challenges and tomorrow's opportunities.

STAY CONNECTED



 CONTACT US



 YOUTUBE



 LINKEDIN



 NEWSLETTER

CONNECTION & INTERFACES



HS CODE



UPC CODE

DOWNLOAD OUR APP: OV CONNECT

