


MODEL #
MONPVM-10

Onvif® | GSI



POE PVM **MONITOR**

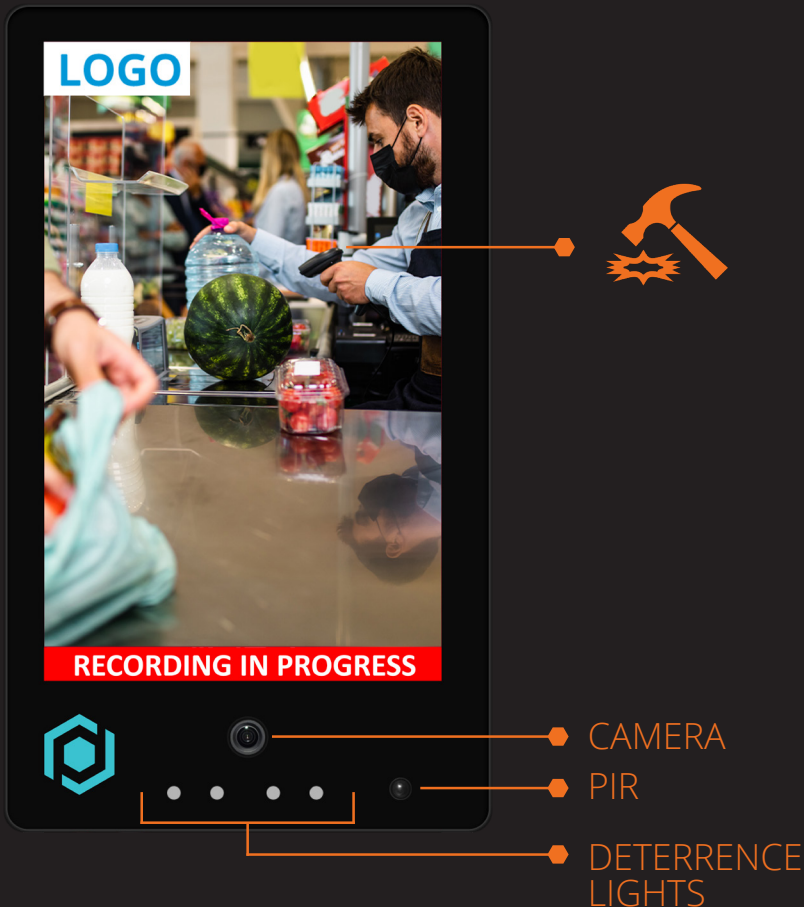

Our innovative PVM Monitor boasts a range of features tailored for retail settings, including pre-recorded messages, reliable power supply, facial recognition, and more, all safeguarded by IK7 tempered glass protection. Paired with our HDMI Camera, equipped with two-way audio and alarm capabilities, it forms a comprehensive security system perfect for retail stores.

 **10.1" IK7 TEMPERED GLASS**

 **CUSTOMIZABLE DISPLAY**

 **WIFI & RJ45 CONNECTION**

 **DC 12/24V OR POE POWERED**

 **CUSTOM ADVERTISEMENT DEPLOY VIA MANAGEMENT SOFTWARE**

 **RECORD DIRECTLY ON LOCAL NVR OR INTEGRATED 1TB SD CARD**

 **BUILT TO RUN 24/7 OR WITH CUSTOMIZED WORK SCHEDULE**

DISPLAY

Screen Size	10.1"
Resolution	1280x800
Brightness	300cd/m ²
Contrast Ratio	1000:1
Viewing Angle	170°/ 170°
Display Color	16.7M
Response Time	< 30 ms

BUILT-IN NDAA IP CAMERA

Sensor	1/2.9", 2MP CMOS
Max Resolution	1920x1080
EMMC/Flash	8GB
DDR/RAM	1GB
Lens	3.3mm (H:80±4°,V:47±3°)
Video Compression	H.264 / H.265
Motion Detection	Supported
Ethernet Port	RJ45×1 10M/100M
Communication	RJ45 / WIFI
Web Application	Support Chrome, Firefox and Edge
Integration Protocol	ONVIF Profile S, API
Image Setting	Contrast, Brightness, Sharpness, Saturation, BLC, WDR, HLC, 3DNR
Trigger Events	PIR/ Motion Detection/ Video Blind/ AI/ Alarm in
Storage	TF Card / NVR / FTP

DETERRENCE MESSAGE & ADVERTISEMENT

Pop-up Deterrence Message	png
Voice Prompt	wav
Brand Logo	png
Picture Format	jpg, png, bmp, gif (resolution:1920*1080)
Video Format	mp4, mkv, mov Video Codec: H.264/265(yuv420 only), Video Rate: MAX 5120Kbps
Display Mode	Full screen video: 800×1280 Video + advertising: video 480×800, advertising 800×800 Full screen advertising: 800×1280
Total AD File Size	1GB (no limitation for the number of pictures and videos)

INTERFACE

Alarm Interface	Motion/Video Blind/Face/PIR Detection
Audio	1TB Max for Remote Recording
USB	PNG Picture ALWAYS Show on PVM
TF Card	PNG Picture Based Pop-up When Event Triggered
PIR Sensor	WAV
Ethernet 10/100	Built-in 3W
Emergency mode trigger interface	Support, 2.4GHz, Auto On


GENERAL

Power Supply	DC12V±10%, POE
Dimensions	166×286×30mm

DOWNLOAD THE SMART GUARDIAN APP



DIMENSIONS

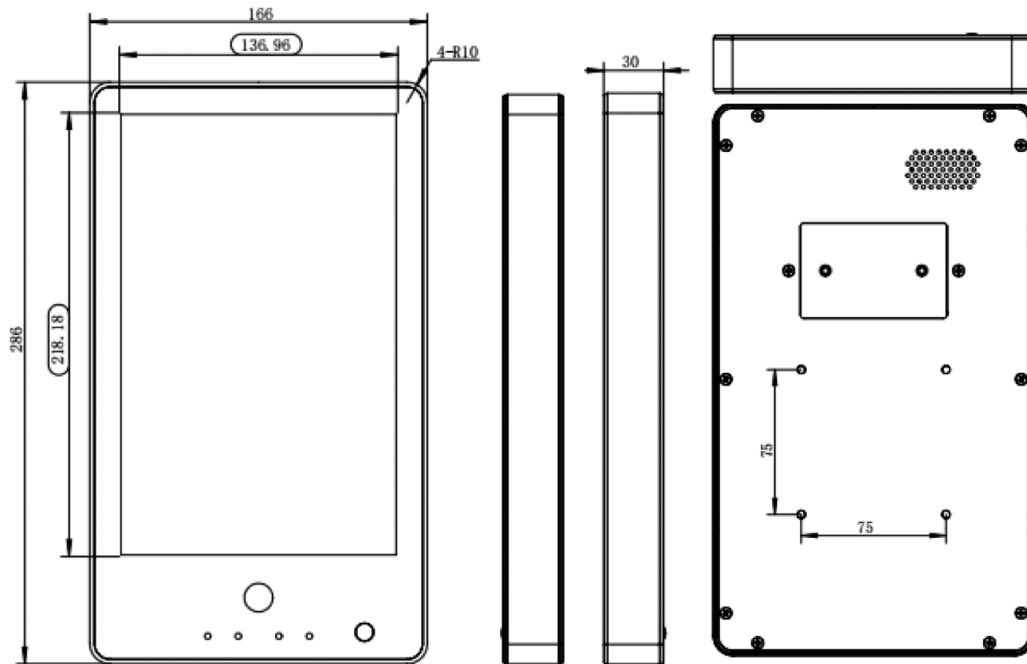

COMPATIBLE ACCESSORIES



 **WMB-PVM10**
WALLMOUNT FOR 10" PVM



 **PMB-PVM10**
PVM 10" POLE MOUNT

SECURITY. INNOVATION. RELIABILITY.

POWERED BY G.S.D GROUP INC.

At G.S.D Group, we design and deliver innovative, reliable, and high-performance security solutions that protect people, businesses, and critical infrastructure. From intelligent surveillance and access control to enterprise software and AI-powered technologies, we provide complete security ecosystems built for today's challenges and tomorrow's opportunities.

STAY CONNECTED



 CONTACT US



 YOUTUBE



 LINKEDIN



 NEWSLETTER

CONNECTION & INTERFACES



HS CODE



UPC CODE

DOWNLOAD OUR APP: OV CONNECT

