

MODEL #
MONPVM-22

Onvif® | GSI



POE PVM **MONITOR**

Our innovative PVM Monitor boasts a range of features tailored for retail settings, including prerecorded messages, reliable power supply, facial recognition, and more, all safeguarded by IK7 tempered glass protection. Paired with our HDMI Camera, equipped with two-way audio and alarm capabilities, it forms a comprehensive security system perfect for retail stores.



DETERRENCE
LIGHTS

 **21,5" IK7 TEMPERED GLASS**

 **CUSTOM ADVERTISEMENT DEPLOY
VIA MANAGEMENT SOFTWARE**

 **CUSTOMIZABLE DISPLAY**

 **RECORD DIRECTLY ON LOCAL NVR
OR INTEGRATED 1TB SD CARD**

 **WIFI & RJ45 CONNECTION**

 **BUILT TO RUN 24/7 OR WITH
CUSTOMIZED WORK SCHEDULE**

 **DC 12/24V OR POE POWERED**



DISPLAY

Screen Size	21.5"
Resolution	1920×1080 Pixel
Brightness	300cd/m²
Contrast Ratio	1000:1
Viewing Angle	178°/ 178°
Display Color	16.7M
Response Time	< 30 ms

BUILT-IN NDAA IP CAMERA

Sensor	1/2.9", 2MP CMOS
Max Resolution	1920x1080
EMMC/Flash	8GB
DDR/RAM	1GB
Lens	3.3mm (H:80±4°,V:47±3°)
Video Compression	H.264 / H.265
Motion Detection	Supported
Ethernet Port	RJ45×1 10M/100M
Communication	RJ45 / WIFI
Web Application	Support Chrome, Firefox and Edge
Integration Protocol	ONVIF Profile S, API
Image Setting	Contrast, Brightness, Sharpness, Saturation, BLC, WDR, HLC, 3DNR
Trigger Events	PIR/ Motion Detection/ Video Blind/ AI/ Alarm in
Storage	TF Card / NVR / FTP

DETERRENCE MESSAGE & ADVERTISEMENT

Pop-up Deterrence Message	png
Voice Prompt	wav
Brand Logo	png
Picture Format	jpg, png, bmp, gif (resolution:1920*1080)
Video Format	mp4, mkv, mov Video Codec: H.264/265(yuv420 only), Video Rate: MAX 5120Kbps
Display Mode	Full screen video: 1920×1080 Video + advertising: video 1200×1080, advertising 720×1080 Full screen advertising: 1920×1080
Total AD File Size	1GB (no limitation for the number of pictures and videos)

INTERFACE

Alarm Interface	Input/ Output×1, FACE Out×1, PIR Out×1, MOTION Out×1
Audio	Built in Speaker×2 5W
USB	Micro USB×1
TF Card	TF Card Slot×1 (Max Support:1TB)
PIR Sensor	×1
Ethernet 10/100	RJ45×1
Emergency mode trigger interface	x1(Once triggered in emergency circumstances, the device will play a preset video or picture to alert.)


GENERAL

Power Supply	DC12V±10%, POE
Dimensions	519.6×353.2×40mm


DOWNLOAD THE SMART GUARDIAN APP



DIMENSIONS

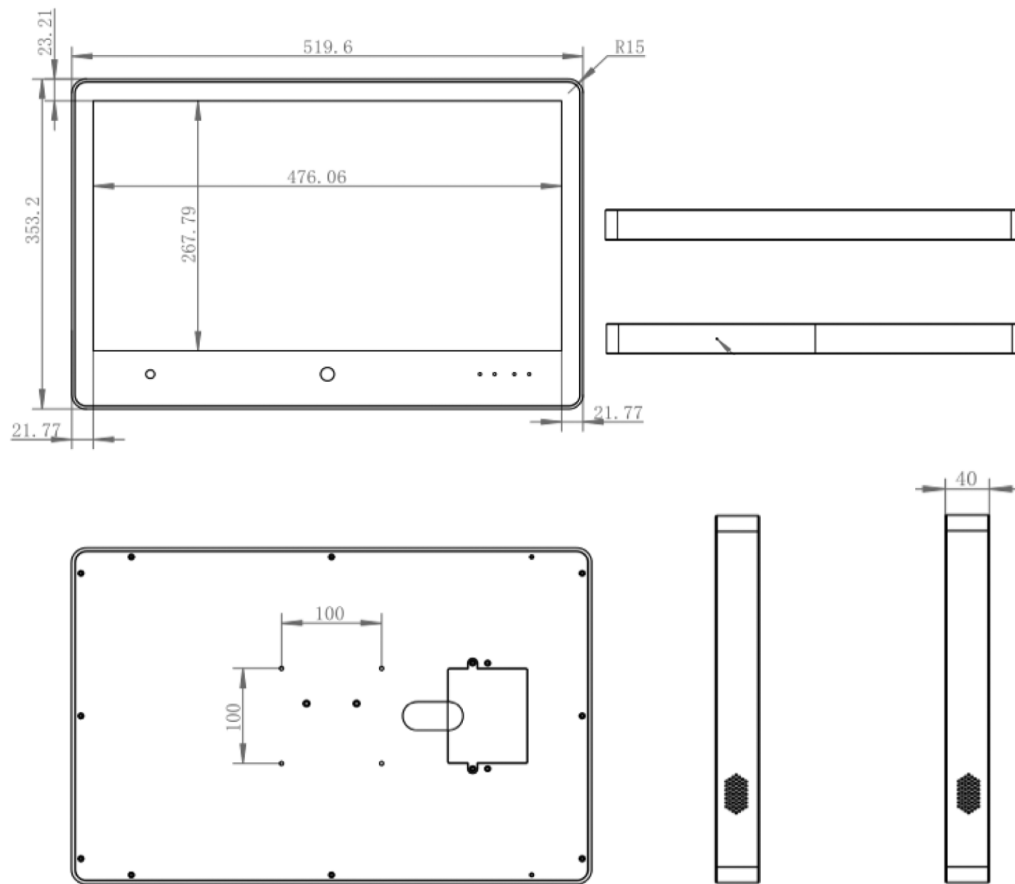

COMPATIBLE ACCESSORIES

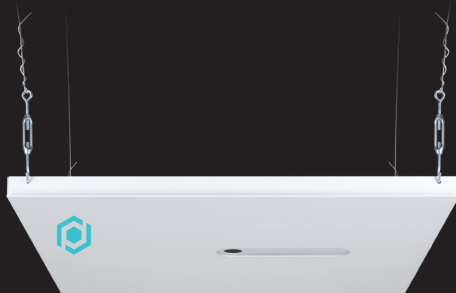

 **CMB-PVM**
PVM SUSPENDED CEILING
MOUNT

SECURITY. INNOVATION. RELIABILITY.

POWERED BY G.S.D GROUP INC.

At G.S.D Group, we design and deliver innovative, reliable, and high-performance security solutions that protect people, businesses, and critical infrastructure. From intelligent surveillance and access control to enterprise software and AI-powered technologies, we provide complete security ecosystems built for today's challenges and tomorrow's opportunities.

STAY CONNECTED



 CONTACT US



 YOUTUBE



 LINKEDIN



 NEWSLETTER

CONNECTION & INTERFACES



HS CODE



UPC CODE

DOWNLOAD OUR APP: OV CONNECT

