

MODEL #

TEBFTV28AIO-5MP-B



FENNEC SERIES



HD ANALOG **EYEBALL CAMERA**



5MP
RESOLUTION



5MP
Resolution

2.8MM Lens



IR Up to 30M

**Built-In
Microphone**



IP66
Dustproof
& Water-Resistant

**TVI-CVI-
AHD-960H**

Introducing the **TEBFTV28AIO-5MP-B**, an analog camera delivering exceptional surveillance capabilities. With a high-resolution 5MP sensor and a wide 2.8mm lens, this camera captures crisp and detailed footage. Equipped with infrared technology, it ensures clear vision up to 30 meters even in low-light conditions. Its IP67 waterproof rating makes it suitable for outdoor installations, while the built-in microphone adds audio monitoring capability. Plus, with TotalView technology, enjoy vivid color images even in the darkness of night. Invest in reliable security with this analog camera for comprehensive surveillance needs.

This camera model is also available in black - TEBFTV28AIO-5MP





VIDEO

Imaging Device	1/2.7" Progressive CMOS
Total Pixels	2608 (H) × 1960 (V)
Effective Pixels	2608 (H) × 1960 (V)
Scanning System	progressive scanning
Min. Illumination	Color 0.04lux @ F1.6(AGC ON) ; B/W 0 lux @ IR ON
Video Output	BNC
Resolution	5MP 2592 (H) × 1944 (V)
Max. Framerate	5AHD/5TVI: 5MP@20fps 4AHD/4CVI/4TVI:P@25fps N@30fps 2AHD/2CVI/2TVI:P@25fps N@30fps CVBS: 960H
Focal Length (Zoom Ratio)	2.8MM
Max Aperture Ratio	F2.0
Angular Field of View	H:102° / V:57.4° / D:124.4°
Min. Object Distance	0.8m
Lens Type	Fixed lens

LAWS AND REGULATIONS

Safety	CE LVD
EMC	CE EMC, FCC
ROHS	RoHS2.0

OPERATIONAL



IR Distance	20M
On Screen Display	English
Day & Night	Ext / Color / B/W
Backlight Compensation	Off / User BLC
Wide Dynamic Range	D-WDR (Off/On)
Digital Noise Reduction	2D DNR
Gain Control	Auto
White Balance	ATW
Electronic Shutter Speed	Auto
Reverse	Mirror
Remote Control Interface	ACP (AHD Coax Protocol)
Video Transmission Distance	MAX 300M (RG-6)

GENERAL

Operating Temperature/ Humidity	-30°C ~ 55°C / 90%
Ingress Protection	IP66
Input Voltage/ Current	12V DC
Power Consumption	IR OFF ≤1W, IR ON ≤4W
Dimensions	Ø128.6 X98.6mm
Weight	appr. 450g



DIMENSIONS

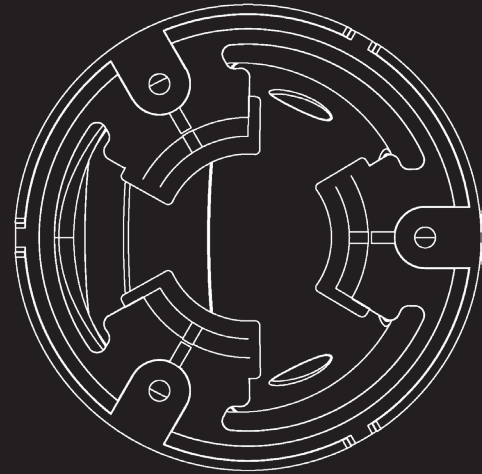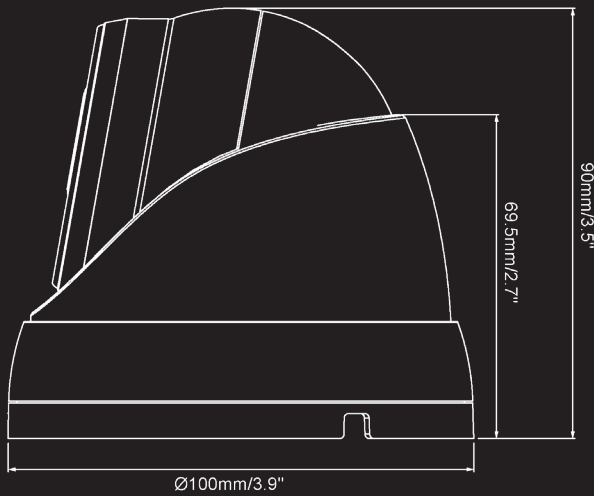

COMPATIBLE ACCESSORIES


CEILING MOUNT SOLUTION



 **CMB6-G**
CEILING MOUNT

 **TEBBASE1-G**
PENDANT

CORNER MOUNT SOLUTION



 **COMB6**
CORNER MOUNT BRACKET

POLE MOUNT SOLUTION



 **PMB6**
POLE MOUNT BRACKET

WALL MOUNT SOLUTION



OR



 **WMB2**
WALLMOUNT BRACKET

 **WMB6**
WALLMOUNT BRACKET

 **TEBBASE1-G**
PENDANT

JUNCTION BOX



 **TEBBASE**
JUNCTION BOX

DOWNLOAD THE SMART GUARDIAN APP



SECURITY. INNOVATION. RELIABILITY.

POWERED BY G.S.D GROUP INC.

At G.S.D Group, we design and deliver innovative, reliable, and high-performance security solutions that protect people, businesses, and critical infrastructure. From intelligent surveillance and access control to enterprise software and AI-powered technologies, we provide complete security ecosystems built for today's challenges and tomorrow's opportunities.

STAY CONNECTED



 CONTACT US



 YOUTUBE



 LINKEDIN



 NEWSLETTER

COMPLIANCE



CE MARKING



FCC CERTIFICATE



RoHS COMPLIANT



NDAA COMPLIANT

CONNECTION & INTERFACES



HS CODE



UPC CODE



ONVIF COMPLIANT

DOWNLOAD OUR APP: OV CONNECT



WWW.GSDGROUPINC.COM



A CANADIAN ENTERPRISE