

MODEL #

XSEBATVIP4MP28-AI-B

CTAVUE®



X SERIES **NETWORK CAMERA**

Onvif® | **GST**



4MP
RESOLUTION



4MP
Resolution

2.8MM Lens



IR Up to 20M

Spectral Light



**Two-Way
Communication**

**Deterrence
Lights**



**Microphone
& Speaker**

Siren



**IP67
Water-resistant
& Dustproof**

**Micro SD Card
Slot up to 1TB**

The **XSEBATVIP4MP28-AI-B** security camera offers exceptional 4MP resolution for crystal-clear monitoring, ensuring enhanced safety around your property. Featuring deterrence lights and a loud siren, it actively deters intruders. The camera's Spectral Light technology enables full-color night vision, providing detailed visibility even in low light conditions. Equipped with AI features, it intelligently detects motion, helping you monitor your surroundings with ease. With two-way communication, you can interact with visitors or potential threats in real-time. Protect your property with this advanced, high-performance security camera. This camera model is also available in white - XSEBATVIP4MP28-AI





X SERIES NETWORK CAMERA

MODEL #

XSEBATVIP4MP28-AI-B

VIDEO

Imaging Device	1/1.8"
Effective Pixels	4MP (2688x1520)
Scanning System	Progressive CMOS
Min. Illumination	Color 0.0005 Lux @ (F1.0, AGC ON) ; B/W 0 lux @ IR ON

OPERATIONAL

IR LED	NA
Warmlight	2
Red and Blue Light	2 (1 Red & 1 Blue)
IR Viewable Length	NA
Warmlight Viewable Length	Up to 20m
Type of Complementary Light	Default warm light
Backlight Compensation	Off/On (5 Zone)
Wide Dynamic Range	WDR
Digital Noise Reduction	3D DNR
Motion Detection	Off/On (8 Level)
Image Setting	Full Color Mode
Privacy Masking	Off/On (4 Zone, Rectangle)
Gain Control	Auto
White Balance	Auto/Manual
Electronic Shutter Speed	1/5 ~ 1/20000s
On-Board Storage	Micro SD slot, up to 1TB
Alarm	NA
Audio	Built-in microphone&Speaker
Hardware Reset	Yes
Smart Features	Rare Sound Detection (SD) , Perimeter Intrusion Detection (PID), Face Detection (FD), Stationary Object Detection (SOD), Crowd Density Detection (CD), Human&Vehicle Detection (PD&VD), Line Crossing Detection (LCD), Queue Length Detection (QD), Heat Map (HM), Cross Counting (CC), License Plate Detection (LPD), Region Entrance and Exiting (RE), Intrusion, Noise Detection

LENS

Focal Length (Zoom Ratio)	2.8 mm
Max Aperture Ratio	F No. 1.0
Angular Field Of View	Horizontal:112°, Vertical: 61°, Diagonal:134°
Min. Object Distance	0.2m
Lens Type	M16

NETWORK


Ethernet	RJ45(10/100BASE-T)
Video Compression Format	H.265/H.264/H.265+/H.264+/MJPEG
Resolution	Main Stream @30fps: 4MP(2688x1520),3MP(2304x1296), 1080P(1920x1080) Sub Stream @30fps: 1080P(1920x1080),720P(1280x720), VGA(640x480) Mobile Stream @30fps: VGA(640x480), QVG(320x240)
Video Quality Adjustment	256Kbps ~ 8Mbps
Bitrate Control Method	CBR/VBR
IP	IPv6
Protocol	TCP/IP,HTTP,DHCP,DNS,DDNS,RTP/RTSP, SMTP,NTP,UPnP,SNMP,HTTPS,FTP
Security	IP address filter;complicated password; Authenticated username and password
Application Programming Interface	ONVIF(Profile G/M/S/T)
Streaming Method	Unicast/Multicast
Compatible Web Browsers	IE10/11, Safari V12.1/above, Firefox V.52/ above, Google chrome V.57/above, Edge V.79/ above

GENERAL

Operating Conditions	-35°+60°C/ Less than ≤ 95% RH
Ingress Protection	IP67
Input Voltage / Current	D12V/POE (IEEE802.3af)
Power Consumption	DC12V:max 5.44W; POE(48V): max 6.48W
Color/Material	Black/Metal
Dimension (LXHP)	115.5mm×97.9mm



DIMENSIONS

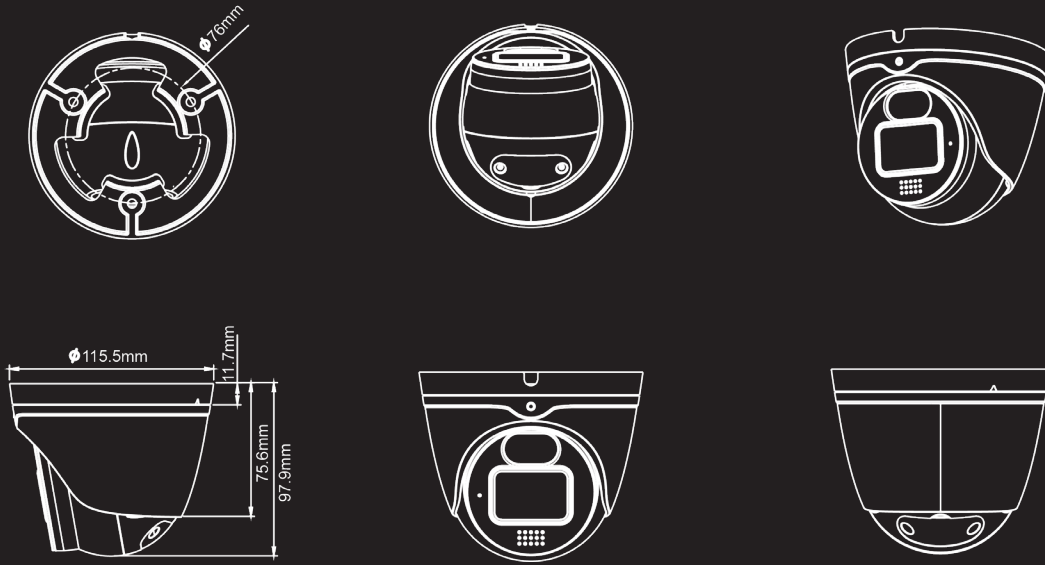

COMPATIBLE ACCESSORIES


CEILING MOUNT SOLUTION



CMB6-G
CEILING MOUNT

TEBBASE1-G
PENDANT

CORNER MOUNT SOLUTION



COMB6
CORNER MOUNT BRACKET

POLE MOUNT SOLUTION



PMB6
POLE MOUNT BRACKET

WALL MOUNT SOLUTION



WMB2
WALLMOUNT BRACKET

WMB6
WALLMOUNT BRACKET

TEBBASE1-G
PENDANT

JUNCTION BOX



TEBBASE1
JUNCTION BOX

DOWNLOAD THE OV CONNECT APP



SECURITY. INNOVATION. RELIABILITY.

POWERED BY G.S.D GROUP INC.

At G.S.D Group, we design and deliver innovative, reliable, and high-performance security solutions that protect people, businesses, and critical infrastructure. From intelligent surveillance and access control to enterprise software and AI-powered technologies, we provide complete security ecosystems built for today's challenges and tomorrow's opportunities.

STAY CONNECTED



 CONTACT US



 YOUTUBE



 LINKEDIN



 NEWSLETTER

COMPLIANCE



CE MARKING



FCC CERTIFICATE



RoHS COMPLIANT



NDAA COMPLIANT

CONNECTION & INTERFACES



HS CODE



UPC CODE



ONVIF COMPLIANT

DOWNLOAD OUR APP: OV CONNECT



WWW.GSDGROUPINC.COM



A CANADIAN ENTERPRISE