

MODEL #

DBW5MP-POE-64G

Onvif® | GSI



PRO WiFi **DOORBELL CAMERA**



FULL HEAD TO TOE VIEW (3:4)

Full head-to-toe view with a unique outward-leaning design for enhanced vertical coverage.



EVENT-ACTIVATED NIGHTLIGHT

Automatically activates the white light when an event is detected.



TWO-WAY COMMUNICATION

Speak with visitors using the built-in microphone and speaker.



PERSON, LOITERING & PACKAGE DETECTION

AI-powered detection for people, loitering activity, and delivered packages.



WIFI TRANSMISSION

Seamless connectivity for easy access to live video footage from anywhere, anytime.



MICRO SD CARD SLOT UP TO 1TB

Store all your footage securely with a micro SD card slot that supports up to 1TB of storage for extensive video recording.





CAMERA

Image Sensor	1/2.7" Progressive Scan CMOS
Image Size	1944 × 2592
Electronic Shutter	1/5s ~ 1/200000s
IRIS Type	Fixed IRIS
MIN. Illumination	0 lux (white LED ON)
Lens	2.1mm@F2.0; Vertical FOV:132°, Horizontal FOV: 96°, Diagonal FOV:163°
Lens Mount	M8
WDR	Yes
BLC	Yes
HLC	Yes

IMAGE

Video Compression	H.265/H.264/MJPEG
H.264 Standard	Baseline Profile/Main Profile/High Profile
Bit rate Type	VBR/CBR
Bit Rate	256Kbps ~ 6Mbps
Resolution	1944 × 2592, 1800 × 2400, 960 × 1280
Main Stream	20fps @ 1944 × 2592, 20fps @ 1800 × 2400
Sub Stream	20fps @ 960 × 1280
Image Setting	Saturation, hue, brightness, contrast, sharpness, 3D NR
Audio Compression	G711A/U

INTERFACES

Network	100M RJ45
Audio	Built-in MIC×1, built-in speaker×1
Reset Button	Yes
Storage	1CH built-in micro SD card slot, up to 1TB
WiFi	Supports 2.4G/5G WiFi
Doorbell Button	Yes
Indicator	Yes

FUNCTION

Remote Monitoring	Web client/CMS remote control/Mobile App
Online Connection	Supports simultaneous monitoring for up to 5 users. Supports multi-stream real time transmission
Network Protocol	UDP, IPv4, DHCP, NTP, RTSP, DDNS, SMTP, UPnP, HTTPS, HTTP
Video Quality Adjustment	256Kbps ~ 8Mbps
Bitrate control method	CBR/VBR
IP	IPv6
Protocol	"TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, SMTP, NTP, UPnP, SNMP, HTTPS, FTP"
Interface Protocol	ONVIF
Storage	Micro SD card storage
Intelligent Analytics	Human Detection, Package Detection, Loitering Detection
General Function	Video mask, Motion
White Light Distance	1m
IR Light Distance	3m
Ingress Protection	IP65

GENERAL


Power	AC/DC 16-24V
PoE Power Supply	Yes
Power Consumption	MAX 6.11W
Operating Temperature	-20°C ~ +50°C Humidity <90%
Dimensions(mm)	146x46x30mm
Weight (net)	115.3g
Installation	Wall mount, (Mounting Bracket, Angled Bracket)

WIRELESS CHIME #DBW-CHIME

Input	AC 100~240 V; 50~60 Hz
Transmission Mode	RF 433 Mhz
Button	Setting up / Selecting Ringtones / Adjusting Volumes
Dimensions	107 × 54 × 39 mm



DIMENSIONS

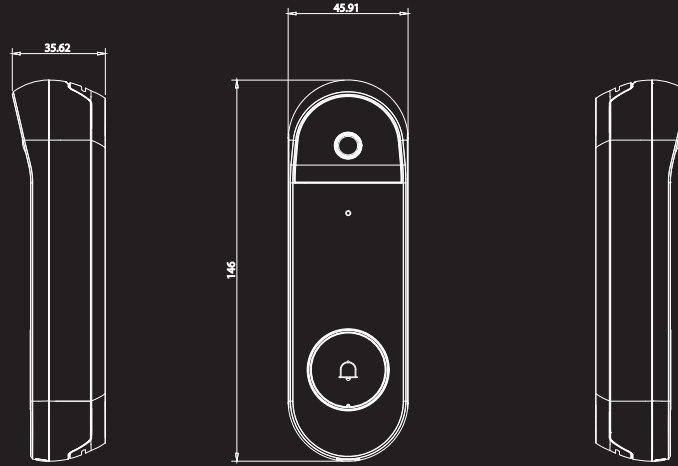

COMPATIBLE ACCESSORIES

INCLUDED ACCESSORIES



 **DBW-CHIME**
WIRELESS CHIME

DOWNLOAD THE OV CONNECT APP



WWW.GSDGROUPINC.COM  **A CANADIAN ENTERPRISE**

SECURITY. INNOVATION. RELIABILITY.

POWERED BY G.S.D GROUP INC.

At G.S.D Group, we design and deliver innovative, reliable, and high-performance security solutions that protect people, businesses, and critical infrastructure. From intelligent surveillance and access control to enterprise software and AI-powered technologies, we provide complete security ecosystems built for today's challenges and tomorrow's opportunities.

STAY CONNECTED



 CONTACT US



 YOUTUBE



 LINKEDIN



 NEWSLETTER

COMPLIANCE



CE MARKING



FCC CERTIFICATE



RoHS COMPLIANT



NDAA COMPLIANT

CONNECTION & INTERFACES



HS CODE



UPC CODE



ONVIF COMPLIANT

DOWNLOAD OUR APP: OV CONNECT



WWW.GSDGROUPINC.COM



A CANADIAN ENTERPRISE