


MODEL #

DBWL5MP-POE-R-64G

Onvif® | GSI



PRO WiFi DOORBELL CAMERA

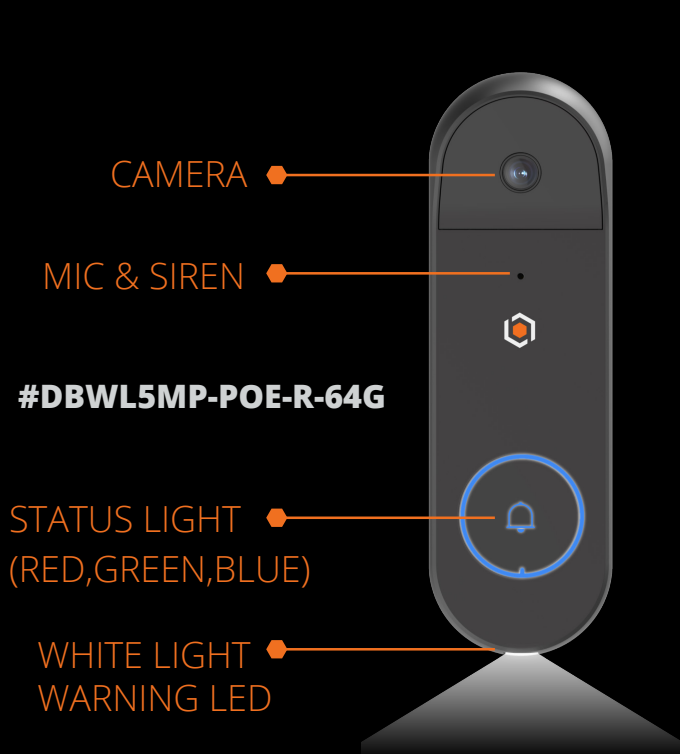

PoE POWERED

**#DBW-CHIME
WIRELESS CHIME
COMES WITH A SET OF
PRE-REGISTERED BELL SOUNDS**

Your Wi-Fi doorbell camera includes one chime, you can add up to three additional chimes to ensure alerts are heard across different areas of your building.



FULL HEAD TO TOE VIEW (9:16)

Get a complete view from head to toe to ensure you never miss any details.



HUMAN & PACKAGE DETECTION

Smart detection alerts you when a human or a package is detected at your door, giving you peace of mind.



RELAY: ONE-TAP ACCESS

Grant seamless, remote entry for your visitors without interrupting your day.



WIFI TRANSMISSION

Seamless connectivity for easy access to live video footage from anywhere, anytime.



TWO-WAY COMMUNICATION

Speak and listen to visitors, delivery personnel, or anyone outside your door with crystal-clear audio.



64GB MICRO SD CARD INCLUDED

Get up to 512GB of secure storage via micro SD, starting with an included card of up to 64GB.





CAMERA

Image Sensor	1/2.7" Progressive Scan CMOS
Image Size	1944 × 2592
Electronic Shutter	1/5s ~ 1/200000s
IRIS Type	Fixed IRIS
MIN. Illumination	0 lux (white LED ON)
Lens	2.1mm@F2.0; Vertical FOV:132°, Horizontal FOV: 96°, Diagonal FOV:163°
Lens Mount	M8
WDR	Yes
BLC	Yes
HLC	Yes

IMAGE

Video Compression	H.265/H.264/MJPEG
H.264 Standard	Baseline Profile/Main Profile/High Profile
Bit rate Type	VBR/CBR
Bit Rate	256Kbps ~ 6Mbps
Resolution	1944 x 2592, 1800 x 2400, 960 x 1280
Main Stream	50/60Hz: 20fps @ 1944 x 2592, 1800 x 2400 (Default)
Sub Stream	50/60Hz: 20fps @ 960 x 1280
Image Setting	Saturation, hue, brightness, contrast, sharpness, 3D NR
Audio Compression	G711A/U

INTERFACES

Network	100M RJ45
Audio	Built-in MIC×1, built-in speaker×1
Reset Button	Yes
Storage	1CH built-in micro SD card slot, up to 512GB
WiFi	Supports 2.4G/5G WiFi
Doorbell Button	Yes
Indicator	Yes
Relay Out	1CH

FUNCTION

Remote Monitoring	Web client/CMS remote control/Mobile App
Online Connection	Supports simultaneous monitoring for up to 5 users. Supports multi-stream real time transmission
Network Protocol	UDP, IPv4, DHCP, NTP, RTSP, DDNS, SMTP, UPnP, HTTPS, HTTP
Interface Protocol	ONVIF
Storage	Micro SD card storage
AI Features	Human Detection, Package Detection, Loitering Detection
General Function	Video mask, Motion
White Light Distance	1m
IR Light Distance	3m
Ingress Protection	IP65

GENERAL

Power	AC 16 ~ 24V, DC 12 ~ 24V
PoE Power Supply	Yes
Power Consumption	MAX 6.11W
Working Environment	-20~+50°C, Humidity: less than 90% (non-condensing)
Dimensions(mm)	146x46x30mm (5.75"x1.81"x1.18")
Weight (net)	115.3g
Installation	Wall mount (Mounting Bracket, Angled Bracket)


WIRELESS CHIME #DBW-CHIMEKIT

Input	AC 100~240 V; 50~60 Hz
Transmission Mode	RF 433 Mhz
Button	Setting up/ Selecting Ringtones/ Adjusting Volumes
Dimensions	106.5x53.5x38.7mm(4.19"x2.10"x1.52")
Dimensions(mm)	107x54x39mm(4.21"x2.13"x1.54")





DIMENSIONS

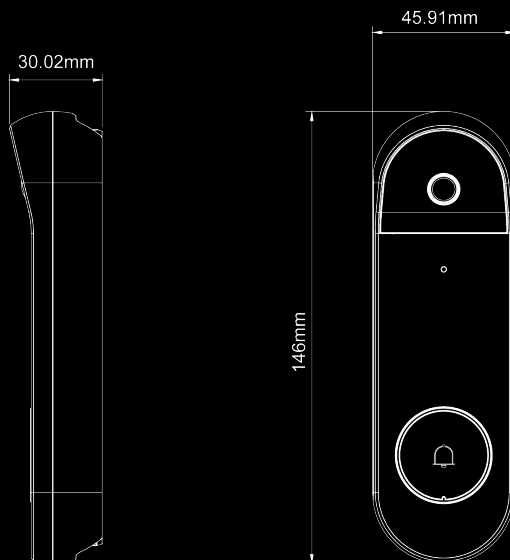


COMPATIBLE ACCESSORIES

INCLUDED ACCESSORIES




DBW-CHIME
WIRELESS CHIME



DBW-CHIMEKIT
CONVERSION KIT FOR
MECHANICAL DOORBELL

OPTIONAL ACCESSORIES



DBW-CHIMEKIT
CONVERSION KIT FOR
MECHANICAL DOORBELL

DOWNLOAD OUR APP: OV CONNECT



SECURITY. INNOVATION. RELIABILITY.

POWERED BY G.S.D GROUP INC.

At G.S.D Group, we design and deliver innovative, reliable, and high-performance security solutions that protect people, businesses, and critical infrastructure. From intelligent surveillance and access control to enterprise software and AI-powered technologies, we provide complete security ecosystems built for today's challenges and tomorrow's opportunities.

STAY CONNECTED



 CONTACT US



 YOUTUBE



 LINKEDIN



 NEWSLETTER

COMPLIANCE



CE MARKING



FCC CERTIFICATE



RoHS COMPLIANT



NDAA COMPLIANT

CONNECTION & INTERFACES



HS CODE



UPC CODE



ONVIF COMPLIANT

DOWNLOAD OUR APP: OV CONNECT



WWW.GSDGROUPINC.COM



A CANADIAN ENTERPRISE