

MODEL #

FE360IP12MP



FISHEYE NETWORK CAMERA

Onvif® | GMST | NDAA Compliant | A



Introducing the groundbreaking **FE360IP12MP** security camera, revolutionizing surveillance. Boasting an exceptional 12MP resolution and a 2.0mm lens providing a 180° horizontal field of view (wall mount) and an astonishing 360° (ceiling mount), this camera ensures unmatched coverage, capturing every angle with breathtaking clarity. Complete with audio input/outputs, an alarm, and a built-in microphone, it offers comprehensive audio surveillance and communication capabilities. Effortlessly connect via P2P for straightforward setup and receive instant notifications, staying informed of any detected activity in real-time. Elevate your security with the FE360IP12MP, setting new standards in advanced surveillance technology.

12MP
RESOLUTION



12MP
Resolution

2.0MM Lens



IR Up to 10M



**Two-Way
Communication**



**Wall Mount 180°
Ceiling Mount 360°**



**Dewarping up to
Nine Divisions**



IP66
**Dustproof &
Water-Resistant**



**Micro SD Card
Slot up to 1TB**





VIDEO

Resolution	4000(H)×3000(V)
Image Sensor	1/2.3" Progressive CMOS
Min. Illumination	Color 0.03lux @ F2.0(AGC ON) ; B/W 0 lux @ IR ON
Shutter	1/5 ~ 1/20000s

LENS TYPE

Lens	2.0mm, horizontal FOV 180° (wall mount), 360°(ceiling mount)
F No.	F 2.0 ±5%

OPERATIONAL

Day and Night	IR cut filter with auto switch (Day/Night/Auto/ Image/Schedule)
WDR	DWDR
Video Compression	H.265/H.264/H.265+/H.2.64+/MJPEG
Video Bit Rate	256Kbps ~ 16Mbps
Tripple Stream	Yes

Resolution		Mainstream :	4000x3000
	@25fps	Substream :	1280x960, 640x480
		Mobilestream :	640x480
		Mainstream :	3000x3000
	@25fps	Substream :	1080x1080, 720x720, 480x480
		Mobilestream :	480x480
		Mainstream :	2560x2560
	@25fps	Substream :	1080x1080, 720x720, 480x480
		Mobilestream :	480x480
		Mainstream :	2160x2160
	@25fps	Substream :	1080x1080, 720x720, 480x480
		Mobilestream :	480x480
		Mainstream :	1520x1520
	@25fps	Substream :	1080x1080, 720x720, 480x480
		Mobilestream :	480x480
		Mainstream :	1080x1080
	@25fps	Substream :	1080x1080, 720x720, 480x480
		Mobilestream :	480x480
		Mainstream :	720x720
	@25fps	Substream :	1080x1080, 720x720, 480x480
		Mobilestream :	480x480
AI Features			N/A

NETWORK


BLC	Support
ROI	Support
Video Analytics	N/A
Protocols	TCP/IP,HTTP,DHCP,DNS,DDNS,RTP/TSP,PPPoE,SMTP,NTP,UPnP,SNMP,HTTPS,FTP
System Compatibility	ONVIF(Profile S, G, T)
Interface	RJ45 10M / 100M
LED	3pcs(SMD)
IR Range	Up to 10m
SD Storage	Micro SD slot, up to 1TB
Alarm Trigger	Yes
Microphone	Yes
Speaker	Yes
Video Output	N/A
Reset Button	Yes
POE	Yes

GENERAL

Operating Conditions	-40~ +60°C/less than ≤ 95% RH
Ingress Protection	IP66
Power Supply	D12V/POE
Power Consumption	3.8-9.6W
Dimensions	Ø120*55mm
Weight	appr 400g



DIMENSIONS

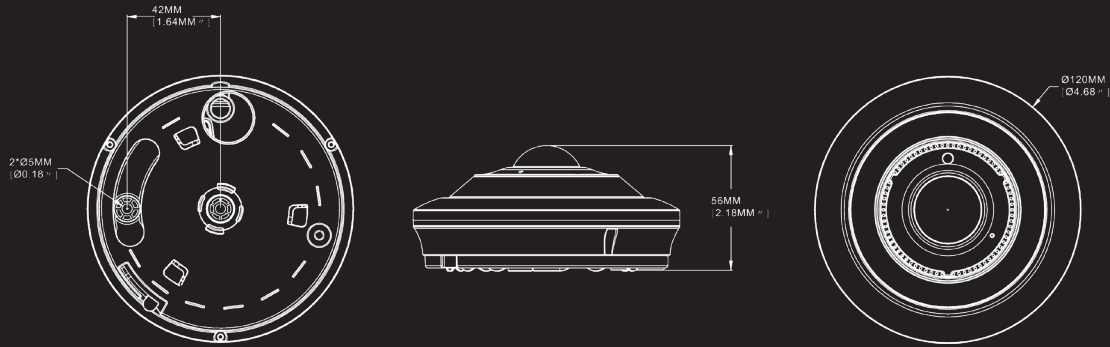

COMPATIBLE ACCESSORIES

CEILING MOUNT SOLUTION




CORNER MOUNT SOLUTION



POLE MOUNT SOLUTION



WALL MOUNT SOLUTION

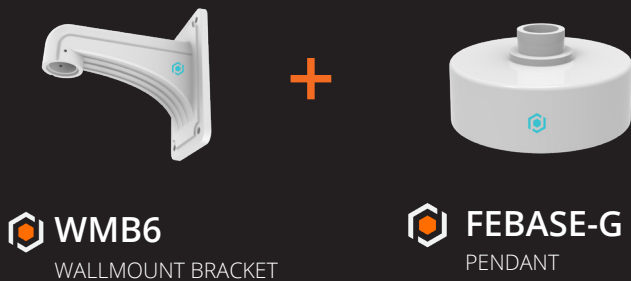

JUNCTION BOX



DOWNLOAD THE OV CONNECT APP



SECURITY. INNOVATION. RELIABILITY.

POWERED BY G.S.D GROUP INC.

At G.S.D Group, we design and deliver innovative, reliable, and high-performance security solutions that protect people, businesses, and critical infrastructure. From intelligent surveillance and access control to enterprise software and AI-powered technologies, we provide complete security ecosystems built for today's challenges and tomorrow's opportunities.

STAY CONNECTED



 CONTACT US



 YOUTUBE



 LINKEDIN



 NEWSLETTER

COMPLIANCE



CE MARKING



FCC CERTIFICATE



RoHS COMPLIANT



NDAA COMPLIANT

CONNECTION & INTERFACES



HS CODE



UPC CODE



ONVIF COMPLIANT

DOWNLOAD OUR APP: OV CONNECT



WWW.GSDGROUPINC.COM  A CANADIAN ENTERPRISE