

MODEL #
MON-TEST-7P



PROFESSIONAL IP **TEST MONITOR**

- 7" SCREEN
- ANALOG & IP CAMERAS
- USB MOUSE PORT
- WEB BROWSER
- HDMI IN/OUT
- AHD | TVI | CVBS | CVI
- LONG BATTERY LIFE
- LEATHER CASE WITH STRAP



Discover the MON-TEST-7P, our professional IP test monitor. Featuring a vivid 7" screen, it seamlessly supports both IP and analog cameras with AHD, TVI, CVBS, and CVI compatibility. With HDMI input/output, a sleek leather case with a strap, and a long-lasting battery, it offers unparalleled portability and versatility. Navigate effortlessly with the USB mouse port and access camera interfaces and settings with the integrated web browser. Invest in reliability and efficiency for your surveillance needs.



PROFESSIONAL IP TEST MONITOR

MODEL #

MON-TEST-7P

LCD

Display Resolution	1280(H) X (R,G,B) X 800(V)
Size	7 inch
Pixel Pitch	0.117mm(H) X 0.177mm(V)
Brightness (CD)	400 Cd/m ²
Viewing Angle	89°(H) / 89°(V)
Response Time	11ms

VIDEO INPUT

HDMI	~1080p 60
HD-SDI	1.485Gbps
HD Analog	AHD 1M, 2M, 4M / TVI 1M, 3M, 4M, 5M / CVI 1M, 2M, 4M / UTC (AHD / TVI)
CVBS	CVBS NTSC/PAL 1.0Vp_p COAX
LAN	10/100Mbps - IP camera&PoE

VIDEO OUTPUT


HDMI	Up to 1080p 60
LAN	10/100Mbps


LEVEL & FOCUS METER

HD-SDI / HD ANALOG / CVB-SHD-CVBS	S.Level Meter/Focus Meter A,F Level Meter/ Focus Meter
-----------------------------------	---

GENERAL

Power Input	DC 12.6V (use exclusive charger)
Power Output	DC 12V 500mA
Battery (Protection Circuit Built-In)	Li-Polymer: 11.1V, 5680mAh
Operating Condition	0°C ~ +50°C / 0% ~ 80%
Case body / Weight	PCABS / 1kg
Dimensions (MM)	246(W) X 160(H) X 49.9(D)

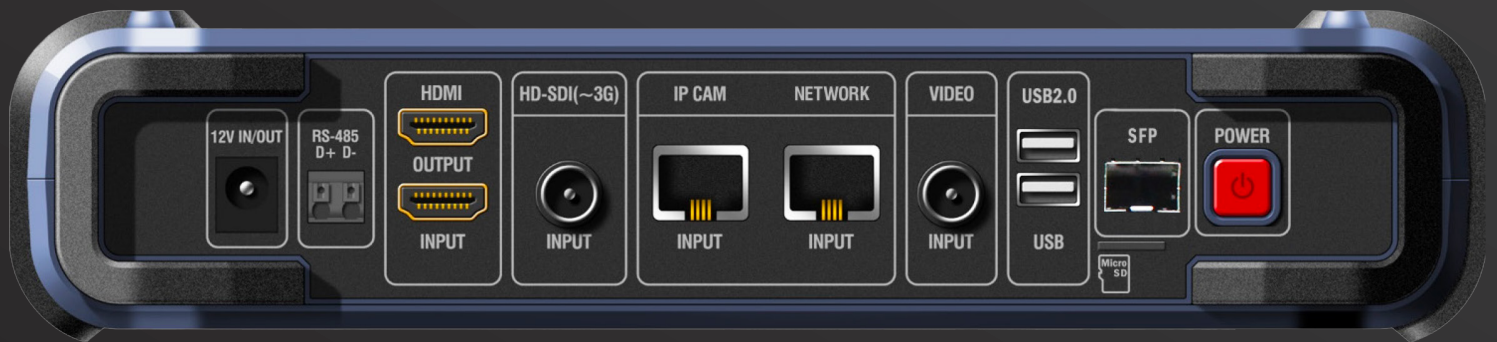

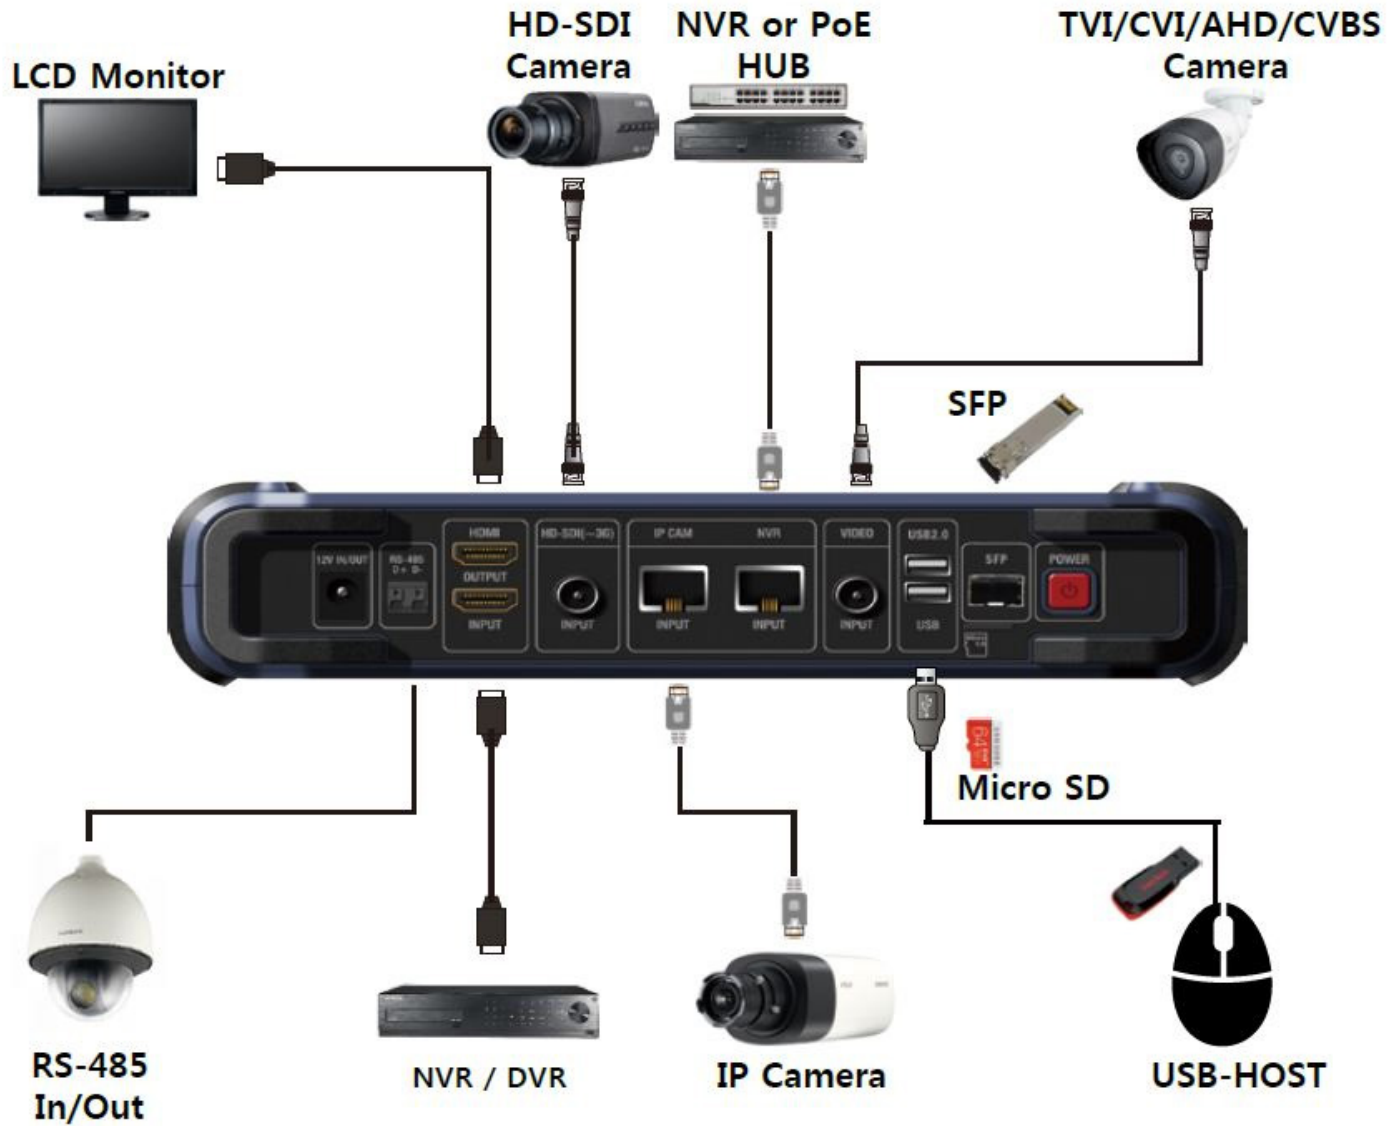

DIMENSIONS

