



FENNEC SERIES

BY




MODEL #

SWC28POE-PRO

ADVANCED L3 24 PORT MANAGED POE SWITCH

Onvif®

GST

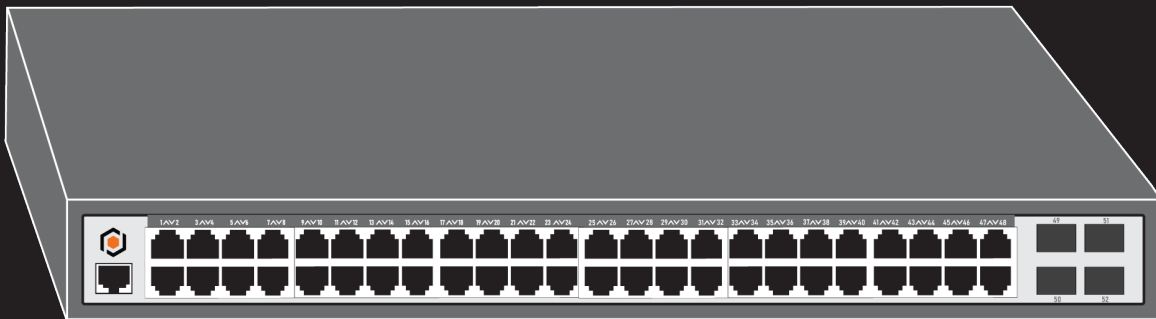

The **SWC28POE-PRO** is a high-performance 24-port Managed PoE switch which provides both power and data over a single Cat5 cable. With Power over Ethernet (PoE) capabilities, it supports 10/100/1000Mbps links and includes gigabit uplink ports. The switch is compatible with the IEEE 802.3af/at standards, delivering efficient power to end devices using an advanced auto-sensing algorithm. Additionally, the gigabit SFP uplink offers an economical solution for long-distance data transmission. The PoE switch automatically detects PoE requirements, speed, and duplex settings for easy operation and reliable performance.



Power over
Ethernet (POE)



GIGABIT Uplink &
SFP Support



Web Smart
Management



Auto-Sensing
Algorithm



Support IEEE
802.3AF/at Standards



Layer 2 and layer 3
Management



Device Monitoring



Real Time
Notifications

WWW.GSDGROUPINC.COM



A CANADIAN ENTERPRISE



FENNEC SERIES

BY



MODEL #

SWC28POE-PRO

HARDWARE SPECIFICATIONS

Connector 24 10/100/1000Base-T RJ45, 4
10/100/1000Base-T RJ45
4 1000 Base-X SFP Combo, 1 x RS232-to-
RJ45 serial port

POE Port 24 10/100/1000Mbps PSE port

LED Indicators Power Indicator: PWR(green).Network
Indicator: Link(green)
PoE Working Indicator: PoE(green).SFP
Indicator: Link(green)

Switch Architecture Store and Forward

Backplane Bandwidth 64Gbps

Packet Forwarding Rate 47.62Mpps

MAC Address 16k

Power Requirement AC100-240V 50/60Hz

ESD Protection 6KV ESD

Dimension (W×D×H) 440mm x 290mm x 44.5mm

Weight 4.5Kg

POWER OVER ETHERNET (POE) SPECIFICATIONS

Network Standard IEEE802.3i 10 BASE-T ; IEEE802.3u 100 BASE-
TX, IEEE802.3ab/z 1000 BASE-TX ; IEEE802.3x
Flow Control

POE Standard IEEE 802.3af Power over Ethernet/PSE
IEEE 802.3at Power over Ethernet Plus/PSE

POE Supply Type 1/2(+), 3/6(-) End-span

POE Power Output Per Port 52V DC, 300mA. max. 15.4 watts
(IEEE 802.3af) Per Port 52V DC, 600mA. max.
30 watts (IEEE 802.3at)


POE Power Budget 400W

ENVIRONMENT

Environment Specification Operating temperature: -20°C-55°C,
Operating humidity: 5% ~95%
Storage temperature: -40°C-75°C,
Storage humidity: 5%~95%

Safety FCC Part15 Class A, CE.RoHS

DIMENSIONS

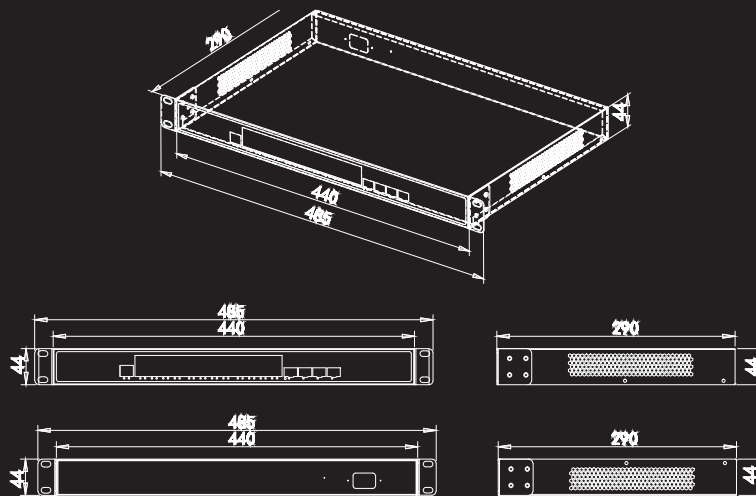

DOWNLOAD THE SMART GUARDIAN APP



WWW.GSDGROUPINC.COM



A CANADIAN ENTERPRISE



L2 SWITCHING

PORT CONFIGURATION

PoE Management	Support Port-base PoE status view and control
Port auto-negotiation	Support
Port Flow Control	Support full duplex IEEE802.3x flow control Support Half-duplex back pressure flow control
Broadcast Storm Control	Support broadcast, multicast, DLF packet rate limit
Port Mirroring	Support
Port Isolation	Support
Port Self-Loop Detection	Support
Link Aggregation	IEEE802.3ad LACP and static trunk. Supports up to 128 aggregation groups, each group supports up to 8 ports
Jumbo Frame	Jumbo packets up to 12K bytes
Redundant Port	Support

MAC CONFIGURATION

MAC Address Table Management	Support
Static MAC Address	Support
MAC Address Binding	Support
MAC Address Filtering	Support
MAC Address Learning Control	Control number of port-based MAC address learning

VLAN CONFIGURATION

Port-based VLAN	Support
802.1Q VLANs	Support
MAC-based VLAN	Support
IP-based VLAN	Support
Protocol-based VLAN	Support
Voice VLAN	Support
Vlan Mapping	Support
QINQ	Support

RELIABILITY PROTOCOL

Spanning Tree Protocol	Support STP/RSTP/MSTP
ERSP Protocol	Support G.8032/Y.1344
LLDP	Support LLDP&LLDP-MED
UDLP Protocol	Fully compatible with CISCO's UDLD protocol

ROUTING

ARP	Support static and dynamic ARP
Static Routing	Support

L3 SWITCHING

L3 ROUTING PROTOCOL

RIP	Support RIP v1/v2
OSPF	Support OSPF v2
Policy Routing	Support
VRRP	Support

MULTICASTS FUNCTIONS AND PROTOCOLS

Static Multicast MAC Address	Support
IGMP Snooping	Support IGMP SNOOPING v1/v2/v3
MVR	Support
GMRP	Support

ACL ACCESS CONTROL LIST

ACL Based on Standard IP	Support
ACL Based on Extended IP	Support
ACL Based on MAC IP	Support
ACL Based on MAC ARP	Support
ACL Port Filtering	Support
ACL Based on Time	Support

QOS

Queue Scheduling Algorithms	Support WRR
Classification Based on Port	Support
Classification Based on 802.1P	Support
Classification Based on DSCP	Support
Classification Based on ACL	Support
QOS Policy	Supports mapping of different data streams to different queues. Support data stream to modify COS or DSCP value. Support the speed limit of data stream. Support data stream statistics. Support data stream mirroring

DHCP

DHCP Client	Support
DHCP Snooping	Support
DHCP Relay	Support
DHCP Server	Support
DHCP Option 82	Support

SECURITY

ACL	Support Standard IP / Extend IP / MAC IP / ARP
------------	--

SECURITY. INNOVATION. RELIABILITY.

POWERED BY G.S.D GROUP INC.

At G.S.D Group, we design and deliver innovative, reliable, and high-performance security solutions that protect people, businesses, and critical infrastructure. From intelligent surveillance and access control to enterprise software and AI-powered technologies, we provide complete security ecosystems built for today's challenges and tomorrow's opportunities.

STAY CONNECTED



 CONTACT US



 YOUTUBE



 LINKEDIN



 NEWSLETTER

COMPLIANCE



CE MARKING



FCC CERTIFICATE



RoHS COMPLIANT



NDAA COMPLIANT

CONNECTION & INTERFACES



HS CODE



UPC CODE

DOWNLOAD OUR APP: OV CONNECT



WWW.GSDGROUPINC.COM



A CANADIAN ENTERPRISE