



FENNEC SERIES

BY



MODEL #


SWC9POE-MAN

# 8 PORT MANAGED POE SWITCH

Onvif®

G S T

NDAA  
Compliant

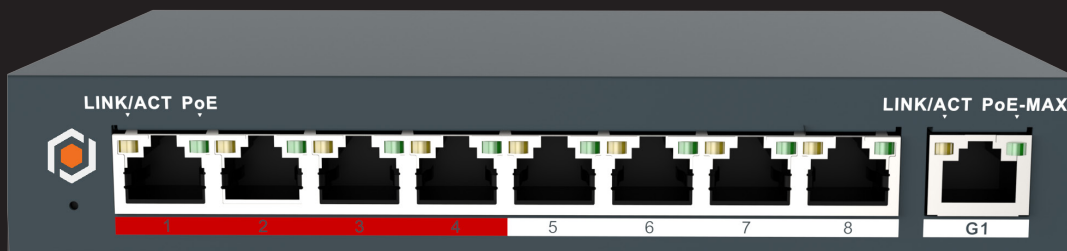

Discover the **SWC9POE-MAN**, our Managed PoE Switch with 1 to 8 ports and extension up to 250 meters, ideal for flexible network deployments. Visual management via VMS and 10 cascade levels facilitate network expansion while ensuring optimal performance. P2P connection, device monitoring, and red port priority ensure maximum performance. With 1000M rates, ensure fast data transfer. Streamline your network management with our Managed PoE Switch.



Visual  
Management  
through the VMS



Topological  
Diagram On VMS Pro



Extended  
Transmission up to  
250M



MAX 10 Levels of  
Cascades



P2P Connection



Device Monitoring



Red Port Priority



Real Time  
Notifications

[WWW.GSDGROUPINC.COM](http://WWW.GSDGROUPINC.COM)



A CANADIAN ENTERPRISE



# FENNEC SERIES

BY



MODEL #

# SWC9POE-MAN



## Model

## 4-PORTS 10/100M PoE EXTENDER

|                                 |                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Interfaces                      | 8x10/100M PoE+1x-100/1000M Gigabit Ethernet                                                                                            |
| Network Management              | Lite Manager (CMS connection ,POE power consumer statistics, parameter configuration, log checking, firmware update, network topology) |
| IEE Standard                    | 802.3\802.3x\802.3ah\802.3az                                                                                                           |
| Uplink Rate (Individual Port)   | 1000M                                                                                                                                  |
| Downlink Rate (Individual Port) | 1000M                                                                                                                                  |
| Exchange Capacity               | 3.6 Gbps                                                                                                                               |
| Packet Forwarding Rate          | 2.6 Mpps                                                                                                                               |
| Internal Cache                  | 4 Mbits                                                                                                                                |
| POE Standard                    | IEEE 802.3at/af                                                                                                                        |

|                                |                                                          |
|--------------------------------|----------------------------------------------------------|
| POE Port                       | 1~8                                                      |
| Extension Mode (EPOE)          | 250 Meters                                               |
| Max. Power (Individual Port)   | 30W                                                      |
| Max. Power (All Ports)         | 65W                                                      |
| Case                           | Metal                                                    |
| Weight                         | 380g                                                     |
| Dimension (WxDXH)              | 173*100*30mm                                             |
| Operating Temperature/Humidity | Temperature : -10°C~+50°C;<br>Humidity : Less than 90%RH |
| Storage Temperature/Humidity   | Temperature : -40°C~+85°C;<br>Humidity : Less than 90%RH |
| Power Supply                   | 48V/ 1.5A                                                |
| Lightning Protection           | 4KV                                                      |

## DIMENSIONS

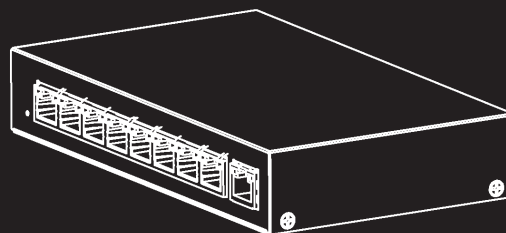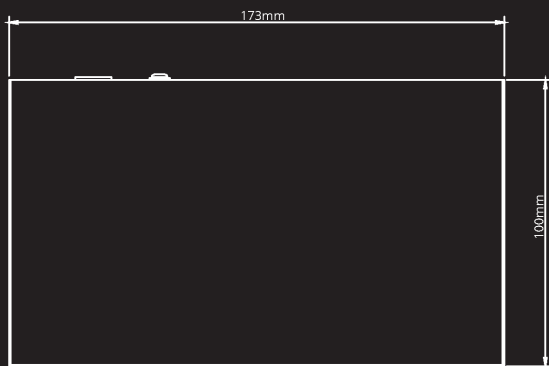

DOWNLOAD THE SMART GUARDIAN APP



WWW.GSDGROUPINC.COM



A CANADIAN ENTERPRISE

# SECURITY. INNOVATION. RELIABILITY.

## POWERED BY G.S.D GROUP INC.

At G.S.D Group, we design and deliver innovative, reliable, and high-performance security solutions that protect people, businesses, and critical infrastructure. From intelligent surveillance and access control to enterprise software and AI-powered technologies, we provide complete security ecosystems built for today's challenges and tomorrow's opportunities.

### STAY CONNECTED



 CONTACT US



 YOUTUBE



 LINKEDIN



 NEWSLETTER

### COMPLIANCE



CE MARKING



FCC CERTIFICATE



RoHS COMPLIANT



NDAA COMPLIANT

### CONNECTION & INTERFACES



HS CODE



UPC CODE

DOWNLOAD OUR APP: OV CONNECT



WWW.GSDGROUPINC.COM



A CANADIAN ENTERPRISE