

MODEL #

T2IP5MP28-L-N



TURRET NETWORK CAMERA

Onvif® | GMS1 | NDAA Compliant | A



5MP
RESOLUTION

5MP
Resolution



2.8MM Lens



IR Up to 30M



Audio In/Out



IP67
Waterproof
& Dust-tight



Micro SD Card
Slot up to 1TB

Discover our **T2IP5MP28-L-N** turret type security camera. It offers an impressive 5 MP resolution, providing remarkably sharp video images. With its powerful infrared capability, it can capture clear images even in total darkness, with a range of up to 20 meters. The 2.8mm lens provides a wide field of view, ensuring comprehensive coverage. Operating efficiently in low-light conditions, with a lux rating of 0.002, this camera also offers the convenience of audio input and output options for enhanced surveillance. Suitable for both indoor and outdoor security applications, it ensures reliable and high-quality monitoring.





VIDEO

Imaging Device	1/2.7"
Effective Pixels	5MP 2880(H) x1620(V)
Scanning System	Progressive CMOS
Min. Illumination	Color 0.004lux @ F1.6(AGC ON) ; B/W 0 lux @ IR ON

LENS TYPE

Focal Length (Zoom Ratio)	2.8mm
Max. Aperture Ratio	F No. 1.6
Angular Field of View	Horizontal: 110°, Vertical: 58°, Diagonal: 133°
Min. Object Distance	1.8m
Lens Type	Fixed(M12)

OPERATIONAL

IR Viewable Length	Up to 30m
Camera Title	Show/Hide
Day & Night	IR cut filter with auto switch (Day/Night/Auto/ Image/Schedule)
Backlight Compensation	Off/On (5 Zone)
Wide Dynamic Range	WDR
Digital Noise Reduction	3D DNR
Motion Detection	Off/On (8 Level)
Privacy Masking	Off/On (4 Zone, Rectangle)
Gain Control	Auto
White Balance	Auto/Manual
Electronic Shutter Speed	1/5 ~ 1/20000s
On-Board Storage	Micro SD slot, up to 1TB
Alarm	N/A
Audio	1 input, 1 output
Hardware Reset	Yes
Smart Features	Rare Sound Detection (SD) , Perimeter Intrusion Detection (PID), Face Detection (FD), Stationary Object Detection (SOD), Crowd Density Detection (CD), Human&Vehicle Detection (PD&VD), Line Crossing Detection (LCD), Queue Length Detection (QD), Heat Map (HM), Cross Counting (CC), License Plate Detection (LPD)

NETWORK


Ethernet	RJ45(10/100BASE-T)
Video Compression Format	H.265/H.264
Resolution	Main Stream @30fps: 5MP(2880x1620),4MP(2592x1520), 3MP(2304x1296), 1080P(1920x1080), 960P(1280X960), 720P(1280x720) Sub Stream @30fps: 720P(1280x720),VGA(640x480),QVGA(320x240) Mobile Stream @30fps: VGA(640x480), QVGA (320x240)
Video Quality Ajustment	256Kbps ~ 8Mbps
Bitrate Control Method	CBR/VBR
Streaming Capability	Triple-Stream(Main/Sub/Mobile)
Protocol	TCP/IP,HTTP,DHCP,DNS,DDNS,RTP/RTSP, SMTP,NTP,UPnP,SNMP,HTTPS,FTP
Security	IP address filter;complicated password; Authenticated username and password
Streaming Method	Unicast/Multicast
Application Programming Interface	ONVIF(Profile S/G/T)
Compatible Web Browsers	IE8,9,10,11, Safari V.11/above, Firefox V.51/ above Google chrome V.44/above

GENERAL

Operating Conditions	-40°+60°C/less than ≤ 95% RH
Ingress Protection	IP67
Input Voltage / Current	D12V/POE(IEEE802.3af)
Power Consumption (IR OFF)	2W-3W
Power Consumption (IR ON)	4W-5.5W
Color/Material	White/Metal
Dimension (WXHXD)	Ø128.6 X98.6mm
Weight	appr. 474g



DIMENSIONS

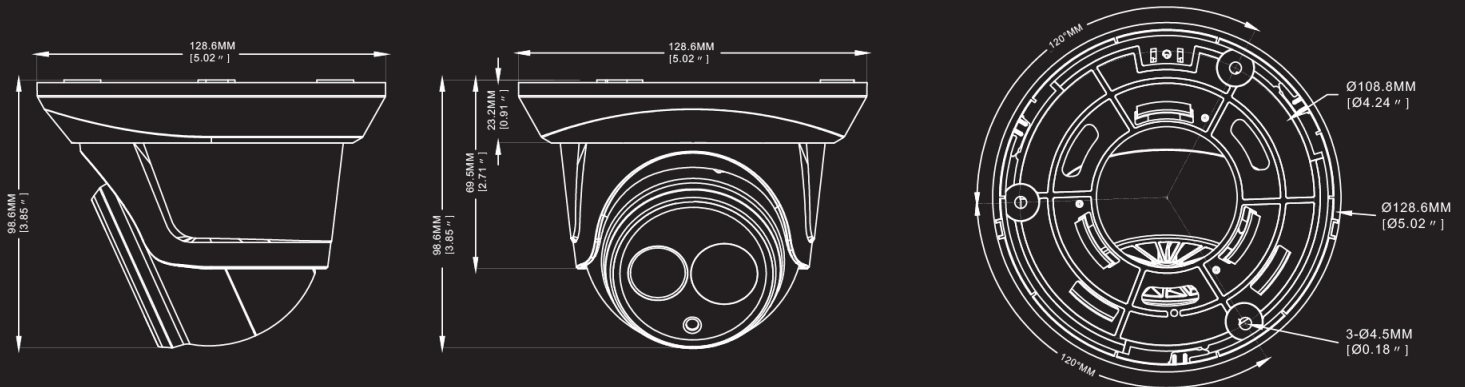

COMPATIBLE ACCESSORIES

CEILING MOUNT SOLUTION



CORNER MOUNT SOLUTION



POLE MOUNT SOLUTION



WALL MOUNT SOLUTION



JUNCTION BOX



DOWNLOAD THE OV CONNECT APP



SECURITY. INNOVATION. RELIABILITY.

POWERED BY G.S.D GROUP INC.

At G.S.D Group, we design and deliver innovative, reliable, and high-performance security solutions that protect people, businesses, and critical infrastructure. From intelligent surveillance and access control to enterprise software and AI-powered technologies, we provide complete security ecosystems built for today's challenges and tomorrow's opportunities.

STAY CONNECTED



 CONTACT US



 YOUTUBE



 LINKEDIN



 NEWSLETTER

COMPLIANCE



CE MARKING



FCC CERTIFICATE



RoHS COMPLIANT



NDAA COMPLIANT

CONNECTION & INTERFACES



HS CODE



UPC CODE



ONVIF COMPLIANT

DOWNLOAD OUR APP: OV CONNECT



WWW.GSDGROUPINC.COM  A CANADIAN ENTERPRISE