

MODEL #

VP360MPOE

Onvif® | GST



AIR QUALITY **SENSOR**

CEILING MOUNT

MICROPHONE

STATUS LIGHT
(RED, GREEN, BLUE)



Our multi-sensor vape detector is a sophisticated device designed to detect vaping in various environments. Equipped with pre-recorded messages, a microphone, and a speaker, it is capable of issuing warnings and alerts effectively. It incorporates ambient temperature detection and sound disturbance detection mechanisms. The presence of deterrent lights adds an additional layer of prevention. Furthermore, it features a robust vandal-proof casing and a self-protection sensor, ensuring its durability and reliability in challenging conditions.



PRE-RECORDED MESSAGES



MICROPHONE & SPEAKER



DETERRENCE LIGHTS



ALARM INPUT



VAPE DETECTION



ROOM TEMPERATURE DETECTION



**VANDAL PROOF HOUSING
AND TAMPER SENSOR**



NOISE DISTURBANCE DETECTION

WWW.GSDGROUPINC.COM



A CANADIAN ENTERPRISE

NETWORK

Protocols	MQTT, Onvif, RTSP, TCP/IP, UDP, IPV4/V6, HTTP, HTTPS, DHCP, DDNS, SMTP, Wireless Connectivity. (RTMP on Road)
Ethernet	RJ-45 (10/100 Base-T)
Wireless	2.4GHz Wi-Fi
Live-View Resolution	1920x1080
Power Port	DC12V
POE	802.3af Standard
Relay (Dry Contact)	Yes
RS-485	Yes
Speaker (Audio)	Yes
Microphone	Yes
Deterrence Light	Yes (RGB)
Multi-Sensor Monitoring	PM1.0/PM2.5/PM10, CO (Carbon Monoxide), HCHO (Formaldehyde), Room Temperature and Relative Humidity Level (%RH), Tamper, NO2 Optional, TVOC (Total Volatile Organic), CO2 (Carbon Dioxide), Noise Disturbance
Power Supply	DC12V/POE
Dimension	144mm Ø x 47mm Thick
Weight	430g
Mounting	Surface-Mount (Ceiling or Wall)
Tamper/Vandal	Security Screw locked in with equivalent to IK8 rated vandal proof housing and with tamper sensor
Housing Material	ABS (Fire-proof) /IP30
Operating Environment	0 °C ~ 50°C and 5 ~90%(Relative Humidity) Non-condensation Indoor Applications


RANGE AND ACCURACY OF MEASUREMENT

PARAMETER	RANGE	RESOLUTION	ACCURACY
PM1.0 PM2.5 PM10	0~500µg	1.0µg/m³	Particle Counting Efficiency: 50% @0.3µm 98%@ ≥0.3µm Accuracy: ±10% FS(@100µm/m³ 25°C, 50% RH
TVOC	Level 1- Level 5 and Relative ppb	1.µg/m³	Typical Accuracy: ±10% FS(@ C2H6O,0.5ppm, Indoor 25°C/50%RH
CO	Level 1- Level 5 and Relative	1ppm	±10 ppm or ±10%
CO2	400~5000ppm	1ppm	±50ppm or ±10%
HCHO	Level 1- Level 5 & Relative ug/ m³	1ug/m³	± 10ug/m³ or ±10%
TEMPERATURE/ HUMIDITY	-20~60°C 0~99%RH		<±1°C @ 0~60°C <±5% @ 10~90%RH
NOISE DISTURBANCE	30~130dB	0.1dB	±1dB (ref: 94dB@1kHz)
RECOMMENDED COVERAGE FLOOR AREA PER DETECTOR (INDOOR APPLICATIONS)	Air-conditioned open floor with ceiling height of:2.7~3.0m: 15~18m² Mechanically ventilated amenities with ceiling height of 2.4~2.7m; Air lock doors and no full-height partitioning: 8~10m²		

DOWNLOAD THE SMART GUARDIAN APP



DIMENSIONS

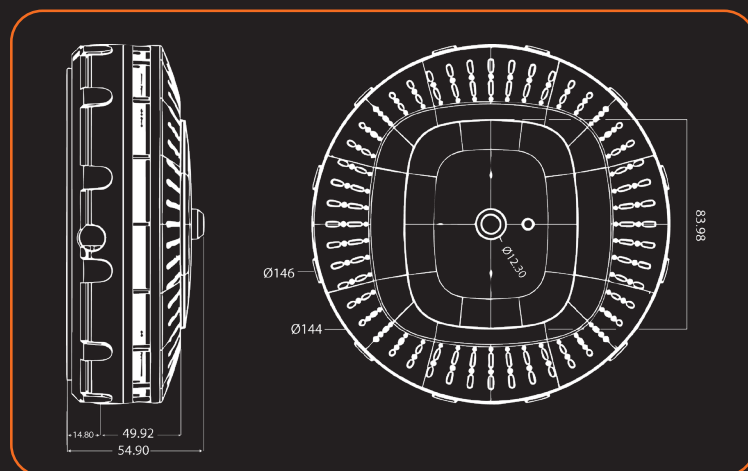

SECURITY. INNOVATION. RELIABILITY.

POWERED BY G.S.D GROUP INC.

At G.S.D Group, we design and deliver innovative, reliable, and high-performance security solutions that protect people, businesses, and critical infrastructure. From intelligent surveillance and access control to enterprise software and AI-powered technologies, we provide complete security ecosystems built for today's challenges and tomorrow's opportunities.

STAY CONNECTED



 CONTACT US



 YOUTUBE



 LINKEDIN



 NEWSLETTER

CONNECTION & INTERFACES



HS CODE



UPC CODE

DOWNLOAD OUR APP: OV CONNECT

